
### **3M Commercial Graphics**

3M<sup>™</sup> Controltac<sup>™</sup> Graphic Film with Comply<sup>™</sup> v3 Adhesive IJ180Cv3

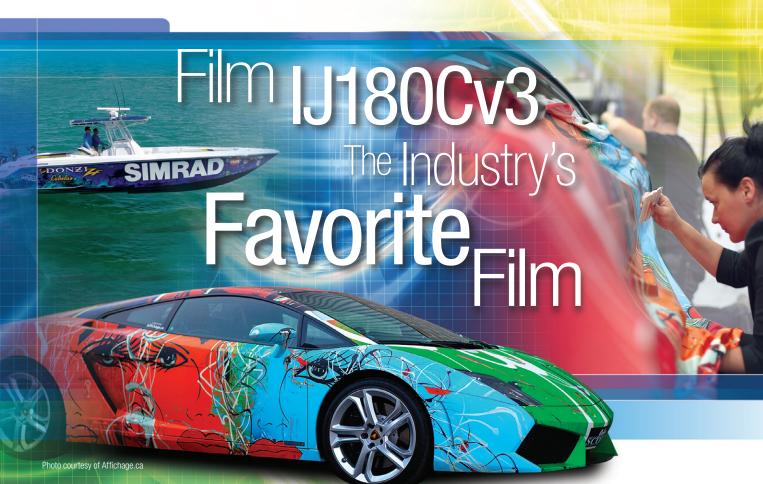

This high performance, removable cast vinyl film is the industry favorite for fleet, vehicle, boat and interior wall graphics as well as exterior signs. It conforms over compound curves and riveted surfaces with ease.

## Great stretch, without lift

This conformable, 2-mil cast vinyl film stretches up to 130%\* without primer and will not lift—no shrinking, cracking, or edge lifting. If stretched too far or repositioning is needed, snap up and the film quickly recovers with heat so panels can be saved—great for redo's. \*See <u>Product Bulletin PU180/180C</u> for details. When stretching beyond 130%, use  $3M^{\sim}$  Tape Primer 94.

## Slide and reposition with ease and confidence

Pressure-activated adhesive allows you to slide the graphic into position until firm pressure is applied, yet will snap up easily if repositioning is needed. Once you've got it adhered where you want it, reliable initial adhesion reduces unnecessary re-squeegeeing.

## Easy, bubble-free installations

Comply<sup>M</sup> v3 Adhesive offers non-visible air release channels for easy installation and a smooth finished appearance.



# Your Power Over Wraps

### More reasons film IJ180Cv3 is the industry favorite:

- Gray adhesive provides excellent hiding power for great looking graphics
  with no show through
- Excellent printability and image quality
- Roll-to-roll consistency
- Fast, clean removal saves you time up to 54 minutes per vehicle



Data shows that when removing wrap film from five vans within the test study, 3M<sup>™</sup> Controltac<sup>™</sup> Graphic Film with Comply<sup>™</sup> v3 Adhesive IJ180Cv3 with 3M<sup>™</sup> Scotchcal<sup>™</sup> Gloss Overlaminate 8518 removed 350% faster than Avery<sup>™</sup> MPI 1005 Supercast Easy Apply RS<sup>™</sup> Cast Vinyl Film with Avery<sup>™</sup> DOL 1060 Gloss.

For more details, go to <u>3Mgraphics.com</u>. Scan here to get there quickly.



### Peace of mind using products that are tested and backed by 3M

**3M<sup>™</sup> MCS<sup>™</sup> Warranty** – The first finished graphics warranty in the industry and still going strong–gives peace of mind to discriminating users that require optimum performance for the intended life of the graphic.

**3M Performance Guarantee** – Adding confidence to your choice when you use select 3M media imaged with an expanding range of 3M-qualified OEM printers and inks.

 $3M^{{\ensuremath{^{\!\!\!\!M\!}}}}$  Controltac  ${\ensuremath{^{\!\!\!M\!}}}$  Graphic Film with Comply  ${\ensuremath{^{\!\!\!M\!}}} v3$  Adhesive IJ180Cv3

Product	Film Characteristics	Adhesive Characteristics	<b>Core</b> (inches)	Roll width (inches)	Roll length (yards)	Printer Compatibility
IJ180Cv3	Opaque, 2 mil, white cast vinyl; luster finish	Pressure-activated, air release channels, gray pigment, removable		30, 36, 48, 54, 60	25, 50, 100, 150, 200	Inkjet printable latex, UV, solvent, eco-solvent

For complete product details and warranted applications, see Product Bulletin PIJ180/180C at 3Mgraphics.com.

#### KNOW IT: Bookmark <u>3Mgraphics.com</u>

BUY IT: Visit <u>3Mgraphics.com/wheretobuy</u> or call 1-800-328-3908

TRY IT: Go to <u>3Mgraphics.com/samples</u> for a sample roll



Warranty and Limitations. The following is made in lieu of all other express or implied warranties, including any implied warranty of merchantability or fitness for a particular purpose. All 3M products are warranted to be free of defects in materials and manufacture at the time of shipment and to meet the specifications stated in the film or media's Product Bulletin. Also see the Commercial Graphics Warranty Brochure, which gives the terms, additional limitations of the warranty, if any, and limitations of liability.



Commercial Graphics 3M Center, Building 220-12E-04 St. Paul, MN 55144 USA General & Technical Information: 1-800-328-3908 Fax 1-651-736-4233 **3M Canada** Post Office Box 5757 London, Ontario N6A 4T1 Canada N64 4T1 1-800-265-1840 Fax 519-452-6245 **3M México S.A. de C.V.** Av. Santa Fe No. 55 Col. Santa Fe, Del. Alvaro Obregón México D.F. 01210 5255-5270-0400 Fax 5255-5270-2277 **3M Puerto Rico, Inc.** 350 Chardon Ave. Suite 1100 San Juan, PR 00918 787-620-3000 Fax 787-620-3018 © 3M 2013 All rights reserved. Release B. July 2013. 3M, Comply, Scotchcal, Controltac, and MCS are trademarks of 3M. Avery and Apply RS are registered trademarks of Avery Dennison Corporation. Please recycle. Printed in the USA. 75-5100-2556-4

